
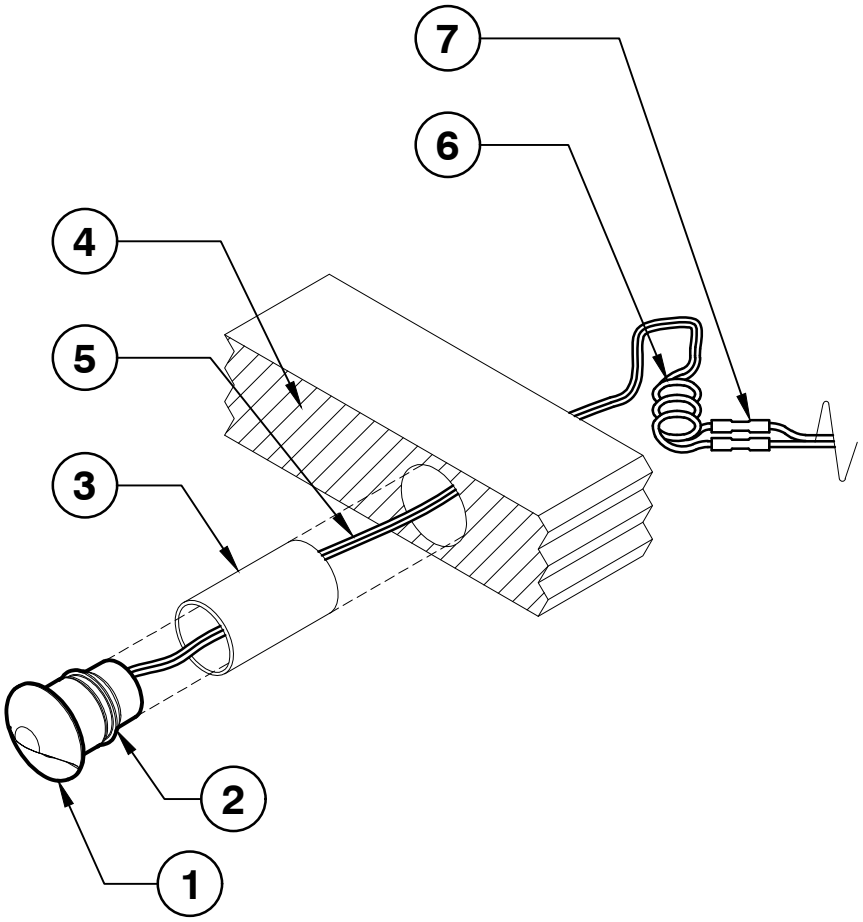


LEGEND:

1. FX LUMINAIRE CN-51 RECESSED WALL LIGHT, FACEPLATE PER PLAN
2. GASKET
3. 2 ½" (635 mm) SCH. 40 OR SDR-21 PVC CONDUIT
4. HARDSCAPE WALL SURFACE
5. POWER FEED
6. DIRECT BURY, UF/UL, COPPER, LOW VOLTAGE CABLE WITH UL 486D (IEC/EN 60998) RATED WATERPROOF CONNECTION. LEAVE 6 in. (150 mm) MINIMUM WIRE LOOP COILED BEHIND FIXTURE FOR FUTURE SERVICE
7. HEAT SHRINK CONNECTION

NOTE:

CORE FOR SLEEVE TO BE 2 1/2" (635 mm.)



HEAT SHRINK CONNECTION

00 FX LUMINAIRE CN-51 RECESSED WALL LIGHT

NOT SCALE