



PROJECT
CATALOG #
TYPE
NOTES



In-Ground Mounting





Recessed Wall Mounting

## VO Wall Light **DESIGNER PREMIUM**

The VO wall light includes a sturdy installation sleeve ideal for landscape applications. Clean stainless steel construction makes the fixture at home in a range of settings.

### Quick Facts

- 316 marine-grade stainless steel
- Compatible with Luxor® technology
- Phase and PWM dimmable
- Input voltage: 10-15V

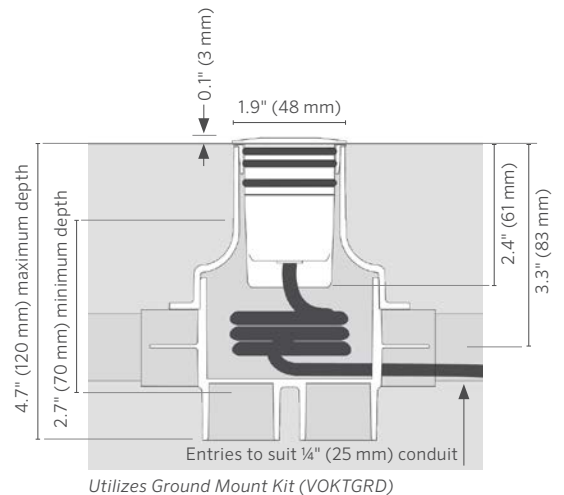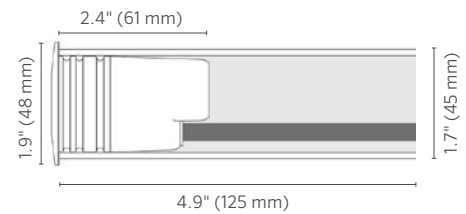

# VO Wall Light SPECIFICATIONS

Output	1LED
Total Lumens	178
Input Voltage	10 to 15V
Input Power (W)	2.8
VA	3.3
Efficacy (Lumens/Watt)	64
Color Rendering Index (CRI)	80+
Center Beam Candlepower	431
Max Candela	51
Dimming	PWM, Phase
RGBW Available	No
Luxor Compatibility	
Z Option	--
ZD Option (default)	Zoning/Dimming
ZDC Option	--
Minimum Rated Life (L70 B10)	55,000 hrs avg

## FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be utilized to create elegant, cutting-edge landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

## Materials

316 marine-grade stainless steel with polymer housing

## Faceplate

316 marine-grade stainless steel

## Lamp

Integrated module with LED

## Optics

Low-glare shielding with 30° beam angle

## Wiring

Flexible rubber cable

## Power

Input 10-15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

## Housing

Polymer

## Finish

Natural stainless steel

## Hardware

Stainless steel

## Ambient Operating Temperature

-4°F to 122°F (-20°C to 50°C)

## Weight

0.9 lbs. (0.4 kg)

## Installation Requirements

Designed for in-ground or recessed wall mounting

## Manufacturing

9001:2015 ISO certified facility

## Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

## Control

ZD utilizes Luxor technology to zone fixtures in up to 250 groups and dim each group in 1% increments between 0 and 100%.

## Warranty

10-year limited warranty

## Listings



# VO Wall Light ORDERING INFORMATION

Fixture	Luxor Option	Output	Finish
VO	■ ZD Zone/Dim	1LED 178 Lumens	■ SS Stainless Steel

EXAMPLE FIXTURE CONFIGURATION:  
VO-ZD-1LED-SS



## MOUNTING OPTIONS: Specify Separately

Accessories	Code
■ GROUND MOUNT KIT Pre-install ground mount kit with conduit entry	VOKITGRD

## VO Wall Light PHOTOMETRICS

### VO 1LED Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candle (Lux)	Vertical 33.2°	Horizontal 35.8°
2.0' (0.6 m)	107.0 fc (1,152 lx)	1.2' (0.4 m)	1.3' (0.4 m)
4.0' (1.2 m)	26.7 fc (287 lx)	2.4' (0.7 m)	2.6' (0.8 m)
6.0' (1.8 m)	11.9 fc (128 lx)	3.6' (1.1 m)	3.9' (1.2 m)
8.0' (2.4 m)	6.7 fc (72 lx)	4.8' (1.5 m)	5.2' (1.6 m)
10.0' (3.1 m)	4.3 fc (46 lx)	6.0' (1.8 m)	6.5' (2.0 m)
12.0' (3.7 m)	3.0 fc (32 lx)	7.2' (2.2 m)	7.8' (2.4 m)