
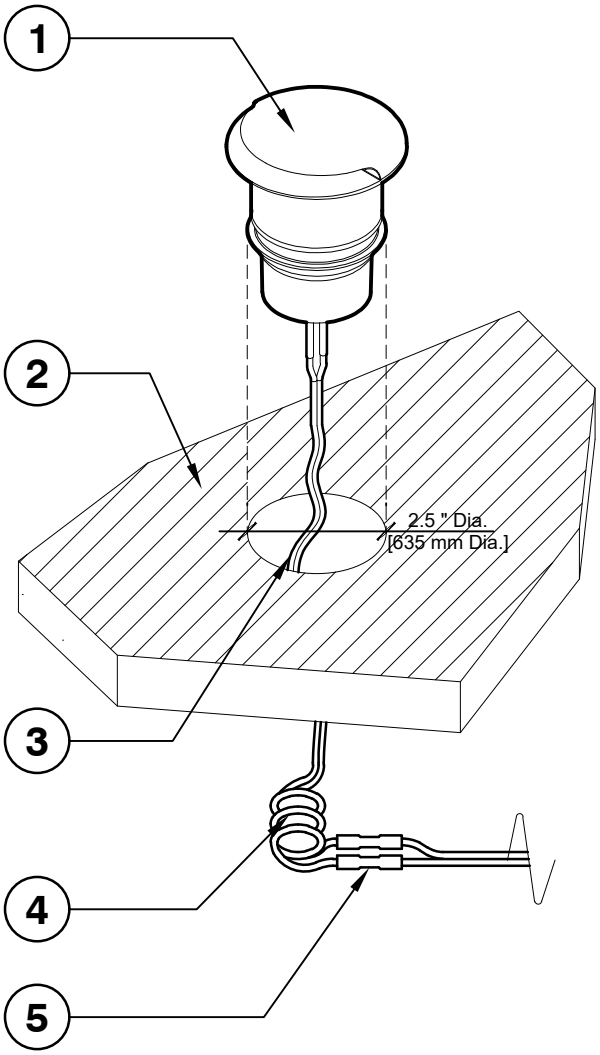


LEGEND:

1. FX LUMINAIRE CG-51 GROUND WASH, FACEPLATE PER PLAN
2. HARDSCAPE SURFACE
3. POWER FEED
4. DIRECT BURY, UF/UL, COPPER, LOW VOLTAGE CABLE WITH UL 486D (IEC/EN 60998) RATED WATERPROOF CONNECTION. LEAVE 6 in. (150 mm) MINIMUM WIRE LOOP COILED BEHIND FIXTURE FOR FUTURE SERVICE
5. HEAT SHRINK CONNECTION

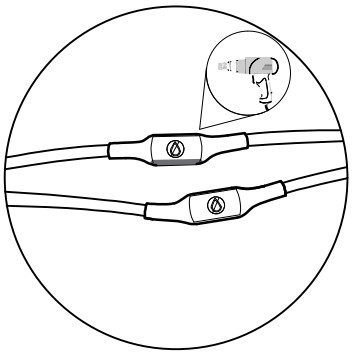

HEAT SHRINK CONNECTION

00 FX LUMINAIRE CG-51 GROUND WASH

NOT SCALE