

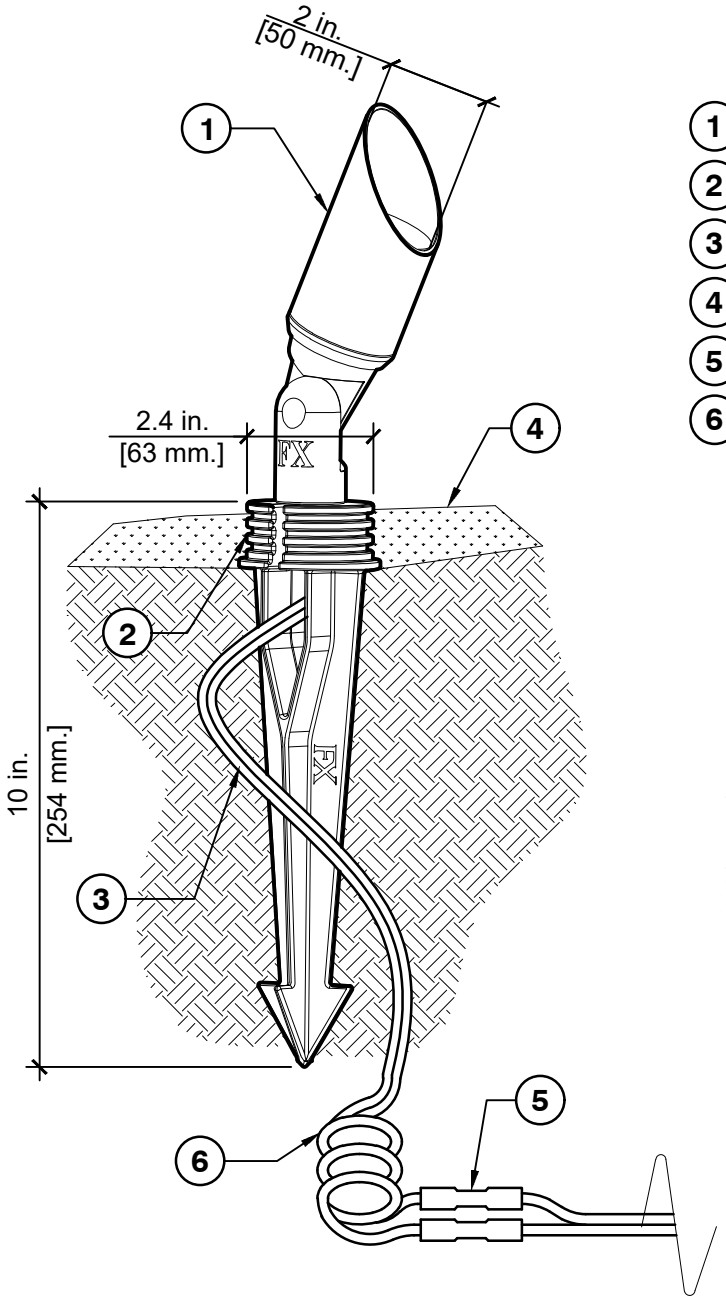


LEGEND:

1. FX LUMINAIRE PINNACLE PA-40 ACCENT LIGHT
2. LONG SLOT SPIKE
3. POWER FEED
4. FINISH GRADE
5. HEAT SHRINK CONNECTION
6. DIRECT BURY, UF/UL, COPPER, LOW VOLTAGE CABLE WITH UL 486D (IEC/EN 60998) RATED WATERPROOF CONNECTION. LEAVE 12 in. (304 mm) MINIMUM WIRE LOOP COILED BEHIND FIXTURE FOR FUTURE SERVICE

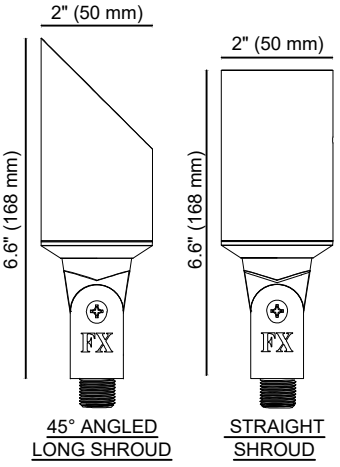

FIXTURE DIMENSIONS



HEAT SHRINK CONNECTION

00 FX LUMINAIRE PINNACLE PA-40 ACCENT LIGHT

NOT TO SCALE