
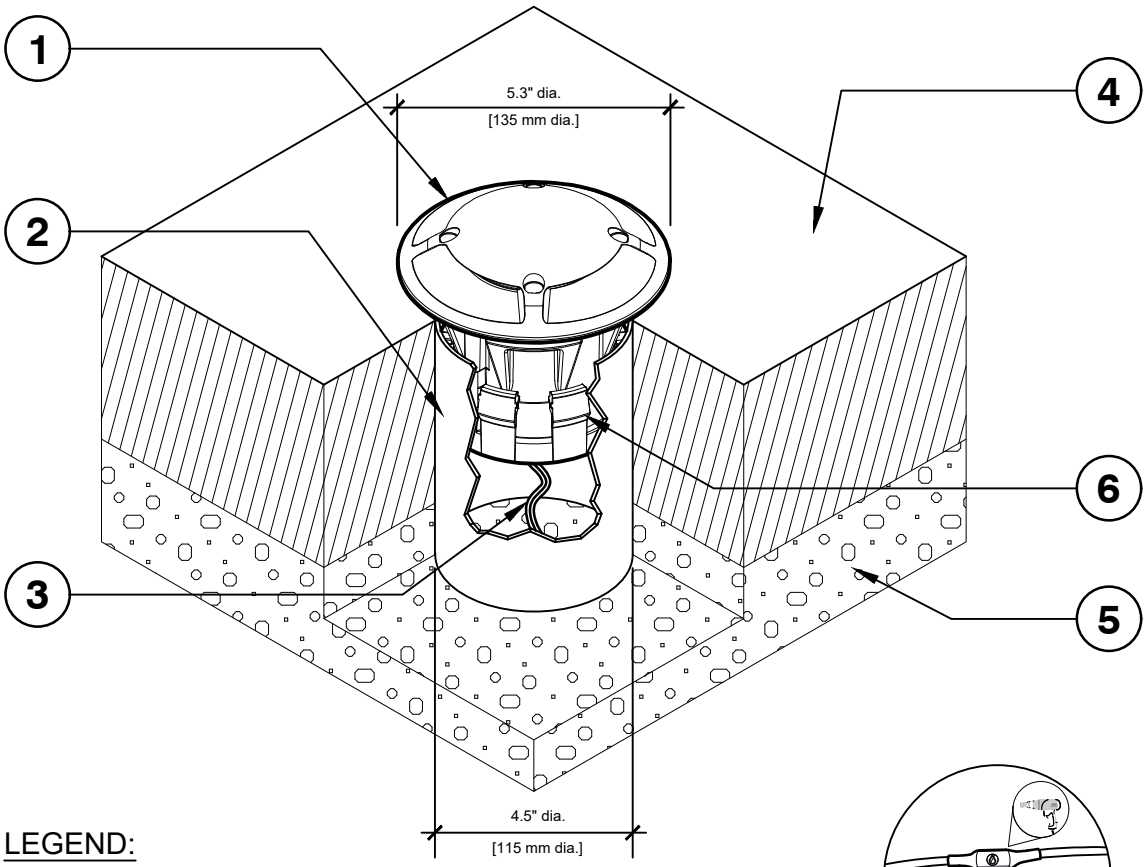


LEGEND:

1. FX LUMINAIRE TG-60 GROUND WASH
2. INSTALLER SUPPLIED PLASTIC SLEEVE, SCH 40 PVC OR SDR-35
3. POWER FEED
4. HARDSCAPE
5. GRAVEL FOR DRAINAGE
6. COLLET (T6X-CLT), PROVIDED BY MANUFACTURER



HEAT SHRINK CONNECTION

NOTES:

- CORE DIAMETER WITHOUT PVC SLEEVE TO BE 4.0" [102 MM]
- MINIMUM DEPHT 6.5" [165.1mm]
- MANIPULATE BLINDS TO ALTER LIGHTING OUTPUT

00 FX LUMINAIRE TG-60 GROUND WASH

NOT TO SCALE