Luxor Lighting Controller



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

The Luxor Controller offers zoning, dimming, and RGBW color-changing capabilities, plus optional Wi-Fi control.

Quick Facts

- Zone control: Up to 250 individual lighting groups of fixtures
- Color control: Create 30,000 colors per zone
- Scene/Theme creation: Up to 40 custom lighting themes
- Wireless control: Optional iOS® and Android™ app
- Dimming control: Adjust the intensities from 0-100%
- Astronomical timing
- Compatible with FX Luminaire Designer Series LED fixtures
- Event-based scheduling
- Calendar-based programming
- 304 stainless steel and powdercoated galvanized construction. UL-1838, UL-379 compliant.

Luxor Dimensions

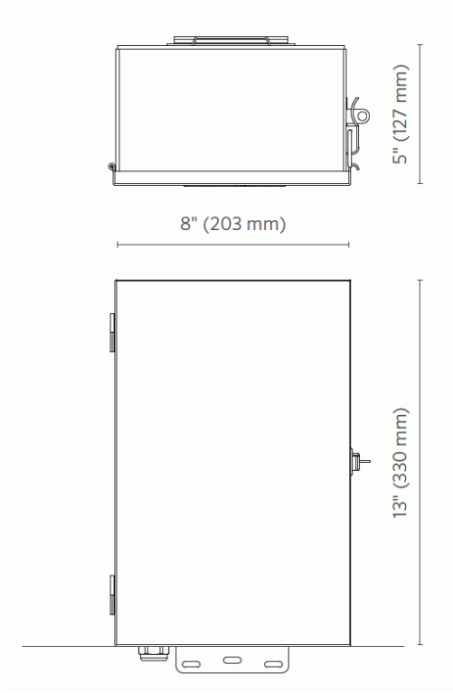

LISTINGS

ADDITIONAL CERTIFICATIONS

Model Configurator

Options are listed per model. Not every combination of options is an orderable catalog number — confirm the configured part number against the model's SKU list before specifying.

LSAT

LSAT				
MODEL	CONTROLLER	WATTAGE	COMPLIANCE	FINISH

CONTROLLER

- ☐ **LSAT**
- ☐ **LUX**

WATTAGE

- ☐ **300**
  300 Watts

COMPLIANCE

- ☐ **EU**
  230 V, CE Certified, 300 W Only
- ☐ **[Default]**
  North America (UL Listed)
- ☐ **E**
  International (CE Certified)

FINISH

- ☐ **M**
  Matte Grey
- ☐ **SS**
  Stainless Steel

LUX

LUX				
MODEL	CONTROLLER	WATTAGE	COMPLIANCE	FINISH

CONTROLLER

- ☐ **LSAT**
- ☐ **LUX**

WATTAGE

- ☐ **300**
  300 Watts

COMPLIANCE

- ☐ **EU** — 230 V, CE Certified, 300 W Only
- ☐ **[Default]** — North America (UL Listed)
- ☐ **E** — International (CE Certified)

FINISH

- ☐ **M** — Matte Grey
- ☐ **SS** — Stainless Steel

Accessories

POWER

- ☐  **SURGE-MOD** — Surge Protection Module
- ☐  **LCM-LV** — Luxor Cube - Low-Voltage
- ☐  **LCM-HV** — Luxor Cube - Line-voltage
- ☐  **LCM-RLY010V** — Luxor Cube - Relay, 0-10V dimming
- ☐  **WIFIMOD2** — Luxor Wi-Fi Module
- ☐  **WIFIMOD2RMT** — LUXOR 2.0, EXT. WIFI MODULE
- ☐  **LINK-MOD** — Luxor Wireless Linking Module
- ☐  **LINK-MOD-E** — Luxor Wireless Linking Module
- ☐  **LUMA-KEY** — LumaKey™ Utility