
Replacement Parts

ITEM	DESCRIPTION	PART #
1	Lens	†
2	Shroud	†
3	Hex Baffle	†
4	Gasket	†
3-4	Gasket and Hex Assembly	CA73HEXGASKET
5	Lamp, PAR-36	See Lamp Chart
6	O-Ring for AB Finish	250010280061SP
	O-Ring for FB Finish	250010280065SP
7	Cable Assembly, 18 AWG SPT	CA73WIRELEAD
8	Body	†
9	Screw, ¼"-20 x ¾"	†
10	Knuckle	†
11	Critter Plug	250031010000SP
9-11	Knuckle Subassembly	KFM-050-C-XX*
12	Lock Ring	250030410000SP
13	Long Slot Spike	250015840000

** XX = Finish code*
† = This part is not serviceable. Contact Customer Support or a local distributor to order a complete product.

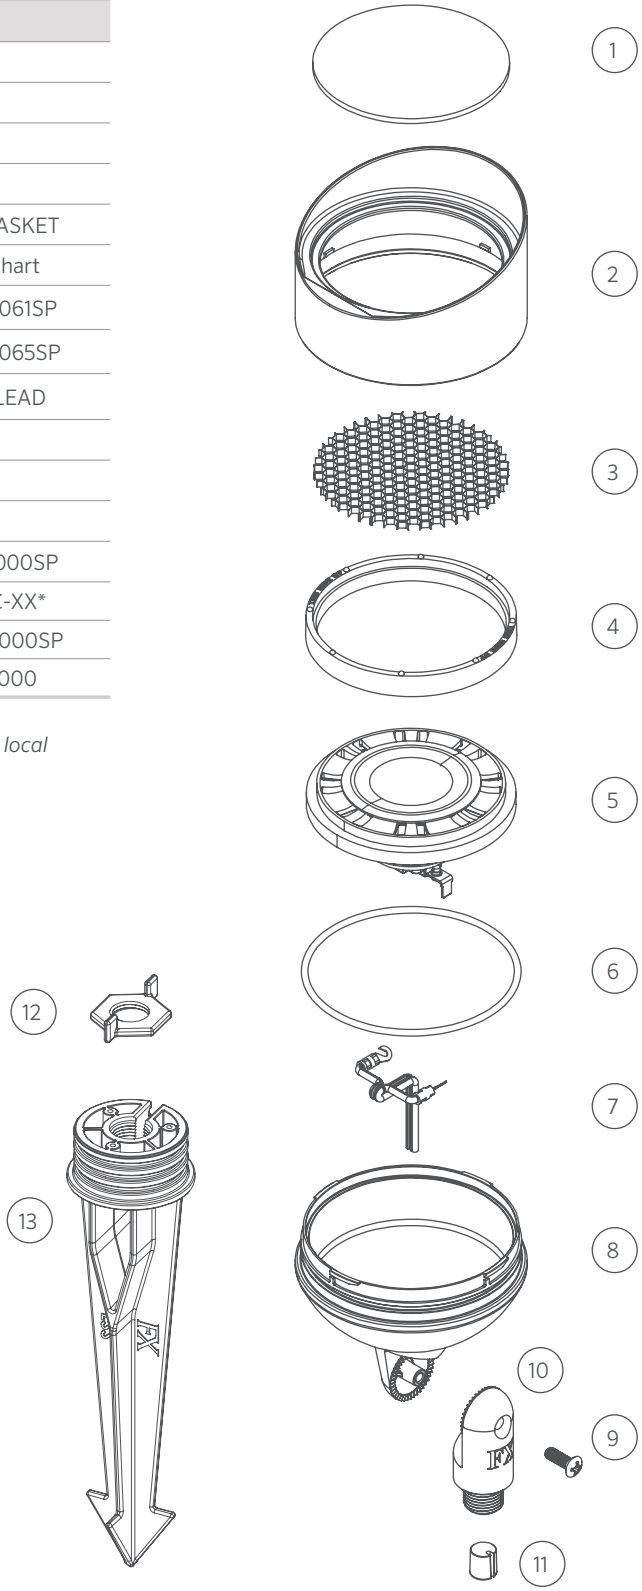

PAR-36 Eco Lamp Chart

LUMENS / VA	CCT	BEAM ANGLE	PART #
685 lm / 8.5 VA	2700K	35° Flood	PAR36-ECO-35-W-FL
665 lm / 8.5 VA	2700K	60° Wide Flood	PAR36-ECO-35-W-WF
675 lm / 8.5 VA	3000K	35° Flood	PAR36-ECO-35-S-FL
675 lm / 8.5 VA	3000K	60° Wide Flood	PAR36-ECO-35-S-WF
855 lm / 11.4 VA	2700K	35° Flood	PAR36-ECO-50-W-FL
860 lm / 11.4 VA	2700K	60° Wide Flood	PAR36-ECO-50-W-WF
845 lm / 11.4 VA	3000K	35° Flood	PAR36-ECO-50-S-FL
850 lm / 11.4 VA	3000K	60° Wide Flood	PAR36-ECO-50-S-WF



PAR-36 Eco

fxl.com/**PAR36**